



All areas and dimensions are subject to survey, engineering and detailed design and may change without notice. © Copyright of Burgess Design Group.

LEGEND

- Local Development Plan Area
- Quiet house design package A
- Quiet house design package B
- No vehicular access
- 3m primary street set back

PROVISIONS

General

1. The provisions of the City of Kalamunda Local Planning Scheme No.3 and State Planning Policy 7.3 Volume 1: Residential Design Codes are varied within this LDP. All other requirements of the Scheme and R-Codes shall be satisfied.

Quiet house Design


2. Single storey dwellings shall be constructed to the applicable Quiet House Design Package shown on the LDP Map and the deemed to comply specifications listed overleaf. Welshpool Road East shall be used for determining orientation in the application of noise mitigation measures.
3. Two storey dwellings and/or alternative constructions from deemed to comply Quiet House Design standards shall be supported by a report prepared by a suitably qualified acoustical consultant.

Vehicular access

4. No vehicular access is permitted across property boundaries in locations depicted on this LDP.

Setbacks

5. Buildings shall be set back a minimum of 3m from the primary street (note: this does not apply to garages and does not limit the operation of cl.5.1.2 C2.1iii-v, C2.2c C2.3 or C2.4 of the R-Codes).
6. Garages shall be set back a minimum of 4m from the primary street.
7. Walls not higher than 3.5m with major openings shall be set back a minimum of 1.2m from lot boundaries.
8. Walls not higher than 3.5m without major openings shall be set back a minimum of 1m from lot boundaries.
9. Walls not higher than 3.5m may be built up to two side boundaries within the following limits:
 - 9.1. up to 1/3 the length of the balance of the lot boundary behind the street setback on one side boundary, and
 - 9.2. up to 2/3 the length of the balance of the lot boundary behind the street setback on the second side boundary.

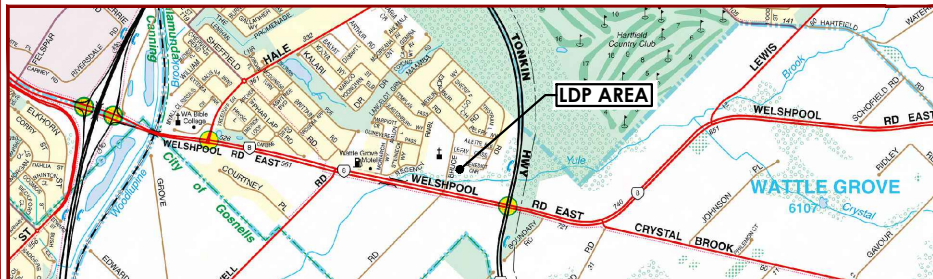

APPROVED

This Local Development Plan has been approved by the City of Kalamunda under clause 52(1)(a) of the deemed provisions of Local Planning Scheme No.3


24 / 01 / 2023
 Authorised Officer Date



**LOCAL DEVELOPMENT PLAN
WATTLE BROOK ESTATE
WATTLE GROVE**

Quiet House Package A

56-58 dB $L_{Aeq}(\text{Day})$ & 51-53 dB $L_{Aeq}(\text{Night})$

Element	Orientation	Room	
		Bedroom	Indoor Living and Work Areas
External Windows	Facing	<ul style="list-style-type: none"> Up to 40% floor area ($R_w + C_{tr} \geq 28$): <ul style="list-style-type: none"> Sliding or double hung with minimum 10mm single or 6mm-12mm-10mm double insulated glazing; Sealed awning or casement windows with minimum 6mm glass. Up to 60% floor area ($R_w + C_{tr} \geq 31$): <ul style="list-style-type: none"> Sealed awning or casement windows with minimum 6mm glass. 	<ul style="list-style-type: none"> Up to 40% floor area ($R_w + C_{tr} \geq 25$): <ul style="list-style-type: none"> Sliding or double hung with minimum 6mm single or 6mm-12mm-6mm double insulated glazing; Up to 60% floor area ($R_w + C_{tr} \geq 28$); Up to 80% floor area ($R_w + C_{tr} \geq 31$).
	Side On	As above, except $R_w + C_{tr}$ values may be 3 dB less or max % area increased by 20%.	
	Opposite	No specific requirements	
External Doors	Facing	<ul style="list-style-type: none"> Fully glazed hinged door with certified $R_w + C_{tr} \geq 28$ rated door and frame including seals and 6mm glass. 	<ul style="list-style-type: none"> Doors to achieve $R_w + C_{tr} \geq 25$: <ul style="list-style-type: none"> 35mm Solid timber core hinged door and frame system certified to $R_w 28$ including seals; Glazed sliding door with 10mm glass and weather seals.
	Side On	As above, except $R_w + C_{tr}$ values may be 3 dB less.	
	Opposite	No specific requirements	
External Walls	All	<ul style="list-style-type: none"> $R_w + C_{tr} \geq 45$: <ul style="list-style-type: none"> Two leaves of 90mm thick clay brick masonry with minimum 20mm cavity; or Single leaf of 150mm brick masonry with 13mm cement render on each face; or One row of 92mm studs at 600mm centres with: <ul style="list-style-type: none"> Resilient steel channels fixed to the outside of the studs; and 9.5mm hardboard or fibre cement sheeting or 11mm fibre cement weatherboards fixed to the outside; 75mm thick mineral wool insulation with a density of at least 11kgkg/m^3; and 2 x 16mm fire-rated plasterboard to inside. 	
Roofs and Ceilings	All	<ul style="list-style-type: none"> $R_w + C_{tr} \geq 35$: <ul style="list-style-type: none"> Concrete or terracotta tile or metal sheet roof with sarking and at least 10mm plasterboard. 	
Outdoor Living Areas		At least one outdoor living area located on the opposite side of the building from the transport corridor and/or at least one ground level outdoor living area screened using a solid continuous fence or other structure of minimum 2 metres height above ground level.	



LOCAL DEVELOPMENT PLAN
WATTLE BROOK ESTATE
WATTLE GROVE

Quiet House Package B

59-62 dB $L_{Aeq}(\text{Day})$ & 54-57 dB $L_{Aeq}(\text{Night})$

Element	Orientation	Room	
		Bedroom	Indoor Living and Work Areas
External Windows	Facing	<ul style="list-style-type: none"> Up to 40% floor area ($R_w + C_{tr} \geq 31$): <ul style="list-style-type: none"> Fixed sash, awning or casement with minimum 6mm glass or 6mm-12mm-6mm double insulated glazing. Up to 60% floor area ($R_w + C_{tr} \geq 34$): <ul style="list-style-type: none"> Fixed sash, awning or casement with minimum 10mm glass or 6mm-12mm-10mm double insulated glazing. 	<ul style="list-style-type: none"> Up to 40% floor area ($R_w + C_{tr} \geq 28$): <ul style="list-style-type: none"> Sliding or double hung with 6mm-12mm-10mm double insulated glazing; Sealed awning or casement windows with minimum 6mm glass. Up to 60% floor area ($R_w + C_{tr} \geq 31$); Up to 80% floor area ($R_w + C_{tr} \geq 34$).
	Side On	As above, except $R_w + C_{tr}$ values may be 3 dB less or max % area increased by 20%.	
	Opposite	As above, except $R_w + C_{tr}$ values may be 6 dB less or max % area increased by 20%.	
External Doors	Facing	<ul style="list-style-type: none"> Fully glazed hinged door with certified $R_w + C_{tr} \geq 31$ rated door and frame including seals and 10mm glass. 	<ul style="list-style-type: none"> Doors to achieve $R_w + C_{tr} \geq 28$: <ul style="list-style-type: none"> 40mm Solid timber core hinged door and frame system certified to $R_w 32$ including seals; Fully glazed hinged door with certified $R_w + C_{tr} \geq 28$ rated door and frame including seals and 6mm glass.
	Side On	As above, except $R_w + C_{tr}$ values may be 3 dB less or max % area increased by 20%.	
	Opposite	As above, except $R_w + C_{tr}$ values may be 6 dB less or max % area increased by 20%.	
External Walls	All	<ul style="list-style-type: none"> $R_w + C_{tr} \geq 50$: <ul style="list-style-type: none"> Two leaves of 90mm thick clay brick masonry with minimum 50mm cavity between leaves and 25mm glasswool or polyester (24kg/m^3). Resilient ties used where required to connect leaves. Two leaves of 110mm clay brick masonry with minimum 50mm cavity between leaves and 25mm glasswool or polyester insulation (24kg/m^3). Single leaf of 220mm brick masonry with 13mm cement render on each face. 150mm thick unlined concrete panel or 200mm thick concrete panel with one layer of 13mm plasterboard or 13mm cement render on each face. Single leaf of 90mm clay brick masonry with: <ul style="list-style-type: none"> A row of 70mm x 35mm timber studs or 64mm steel studs at 600mm centres; A cavity of 25mm between leaves; 50mm glasswool or polyester insulation (11kg/m^3) between studs; and One layer of 10mm plasterboard fixed to the inside face. 	
Roofs and Ceilings	All	<ul style="list-style-type: none"> $R_w + C_{tr} \geq 35$: <ul style="list-style-type: none"> Concrete or terracotta tile or metal sheet roof with sarking and at least 10mm plasterboard ceiling with R3.0+ fibrous insulation. 	
Outdoor Living Areas		At least one outdoor living area located on the opposite side of the building from the transport corridor and/or at least one ground level outdoor living area screened using a solid continuous fence or other structure of minimum 2.4 metres height above ground level.	



LOCAL DEVELOPMENT PLAN
WATTLE BROOK ESTATE
WATTLE GROVE