

SEMI MOUNTABLE KERB DETAIL

SCALE 1:10


150

50mm

CONCRETE KERBING SHALL
CONTAIN FIBRE MESH (0.9kg/m³) AND
SHALL BE 32MPa STRENGTH

FINISHED PAVEMENT LEVEL

23

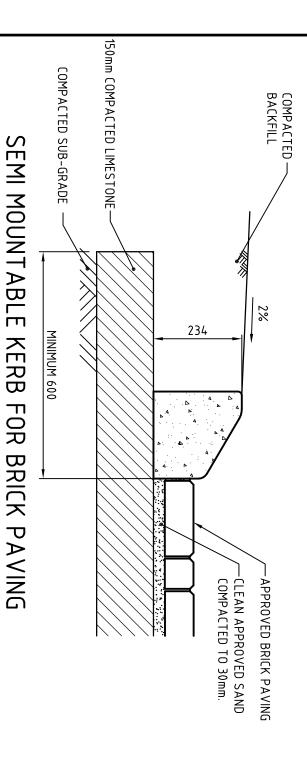

DETAIL (MRD TYPE)

150

SEMI MOUNTABLE KERB

SCALE 1:5 KEYED ON ALL SI WEEPS



SCALE 1:10

- - ASPHALT THICKNESS 30mm AC10.
 CONTRACTION JOINTS AT 2.0m CENTRES.
 EXPANSION JOINTS AT 6.0m CENTRES (TYPE LOCKJOINT ONLY)
 FOOTPATH JOINTS TO COINCIDE WITH KERB JOINTS.
- CONCRETE KERBING SHALL CONTAIN FIRBE MESH $0.9 {\rm kg/m}^3$ ALL MEASUREMENTS ARE IN MILLIMETRES UNLESS NOTED (AND SHALL BE 32MPa STRENGTH
- OTHERWISE.



SEMI MOUNTABLE KERB DETAIL

_AWRENCE 31/07/2006 AS SHOWN

DEPARTMENT OF ENGINEERING SERVICES

SHEET 7C/30